

**FRAME 3014F / 3024F WINDING 6**



**MODELS LL3014F / LL3024F / LL3034F**

REF: F3004FW6-4 APRIL 2013

**WINDING DETAILS**

Code	6	Insulation class	H
Phase	3	Leads	12
Pole number	4	Pitch	2/3

**MECHANICAL DETAILS**

Standard protection		IP23
Overspeed	rpm	2250
Air flow 50Hz/60Hz	m <sup>3</sup> /s	0.37 / 0.44

**EXCITATION DETAILS**

Excitation system	<b>SHUNT</b>	<b>AREP/PMG</b>
AVR model	R250	R438
Sustained short-circuit current	-	300%:10s
Steady state voltage regulation	±0.5%	±0.5%

**WAVEFORM**

*Line voltage on no load or balanced linear rated load*

Total harmonic content THC	<2%
Telephone influence factor TIF (NEMA)	<50
Telephone harmonic factor THF (IEC)	<2%

**LINE VOLTAGE**

*No overvoltage tolerance for 440V 50Hz excitation level*

Frequency / speed	V	50Hz / 1500rpm				60Hz / 1800rpm					
		380	400	415	440	380	400	416	440	460	480
Series star	V	380	400	415	440	380	400	416	440	460	480
Series delta	V	220	230	240		220	230	240			
Parallel star	V		200	208	220		200	208	220	230	240

**RATING**

*Power factor 0.8, Altitude <=1000m*

Class	Rating	kVA	150	150	145	125	159	167	171	179	185	188
Class H rise BR	125/40	kVA	150	150	145	125	159	167	171	179	185	188
		kW	120	120	116	100	127	134	137	143	148	150
Class H rise PR	150/40	kVA	159	159	154	133	169	177	181	190	196	199
		kW	127	127	123	106	135	142	145	152	157	159
Class H rise PR	163/27	kVA	165	165	160	138	175	184	188	197	204	207
		kW	132	132	128	110	140	147	150	158	163	165
Class F rise BR	105/40	kVA	137	137	132	114	145	152	156	163	168	171
		kW	109	109	106	91	116	122	124	130	135	137

**EFFICIENCIES**

*Power factor 0.8*

Efficiency	Class	Rating	%	91.8	91.9	91.9	91.7	91.1	91.4	91.6	91.8	92.0	92.0
110%	Class H BR		%	91.8	91.9	91.9	91.7	91.1	91.4	91.6	91.8	92.0	92.0
100%	Class H BR		%	92.1	92.3	92.1	91.7	91.5	91.8	92.0	92.2	92.3	92.3
75%	Class H BR		%	92.9	92.8	92.6	91.7	92.4	92.6	92.7	92.8	92.8	92.8
50%	Class H BR		%	93.1	92.8	92.3	90.6	92.8	92.9	92.9	92.9	92.7	92.5
25%	Class H BR		%	91.1	90.2	89.3	85.7	91.0	90.9	90.7	90.5	90.1	89.4

**CHARACTERISTIC PARAMETERS**

*Reactance base class H BR rating*

Parameter	Unit	0.35	0.44	0.50	0.83	0.24	0.25	0.27	0.30	0.33	0.41
K <sub>c</sub> Short-circuit ratio		0.35	0.44	0.50	0.83	0.24	0.25	0.27	0.30	0.33	0.41
X <sub>d</sub> D-Axis synchronous reactance (unsaturated)	pu	3.50	3.16	2.84	2.18	4.46	4.22	4.00	3.74	3.54	3.30
X' <sub>d</sub> D-Axis transient reactance (saturated)	pu	0.12	0.11	0.10	0.08	0.15	0.15	0.14	0.13	0.12	0.11
X'' <sub>d</sub> D-Axis sub-transient reactance (saturated)	pu	0.073	0.066	0.059	0.045	0.092	0.088	0.083	0.078	0.073	0.069
X <sub>q</sub> Q-Axis synchronous reactance (unsaturated)	pu	2.10	1.90	1.70	1.31	2.67	2.54	2.40	2.25	2.12	1.98
X'' <sub>q</sub> Q-Axis sub-transient reactance (saturated)	pu	0.086	0.078	0.070	0.054	0.110	0.104	0.098	0.092	0.087	0.081
X <sub>2</sub> Negative-sequence reactance (saturated)	pu	0.080	0.072	0.065	0.050	0.102	0.096	0.091	0.085	0.081	0.075
X <sub>0</sub> Zero-sequence reactance (independent)	pu	0.006	0.005	0.005	0.004	0.007	0.007	0.007	0.006	0.006	0.005
T' <sub>d</sub> D-Axis transient time constant	ms		100					100			
T'' <sub>d</sub> D-Axis sub-transient time constant	ms		10					10			
T' <sub>do</sub> D-Axis open-circuit time constant	ms		2865					2865			
T <sub>a</sub> Armature time constant	ms		15					15			
T <sub>r</sub> Voltage recovery time	ms		< 500					< 500			

**EXCITATION VOLTAGE AND CURRENT**

*Quoted for SHUNT. For AREP/PMG multiply voltage by 0.5 and multiply current by 2*

Parameter	Unit	9.0	10.5	12.0	15.3	6.6	7.0	7.5	8.3	9.2	10.5
No load excitation voltage	V	9.0	10.5	12.0	15.3	6.6	7.0	7.5	8.3	9.2	10.5
No load excitation current	A	0.49	0.57	0.65	0.83	0.36	0.38	0.41	0.45	0.50	0.57
Class H BR excitation voltage	V	35.1	35.9	37.2	37.2	34.0	34.6	34.6	35.5	36.8	37.7
Class H BR excitation current	A	1.91	1.95	2.02	2.02	1.85	1.88	1.88	1.93	2.00	2.05

**WINDING RESISTANCE**

*At 20° C*

Stator line-to-line (series star)	Ω	0.048		Exciter field (series connection -SHUNT)	Ω	18.40
Main field	Ω	3.36		Exciter field (parallel connection -AREP/PMG)	Ω	4.60

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

**FRAME 3014F / 3024F WINDING 6**




**MODELS LL3014F / LL3024F / LL3034F**


REF: F3004FW6-4 APRIL 2013

**LOCKED ROTOR MOTOR STARTING CURVES** *Power factor 0.6*

**50 Hz SHUNT**

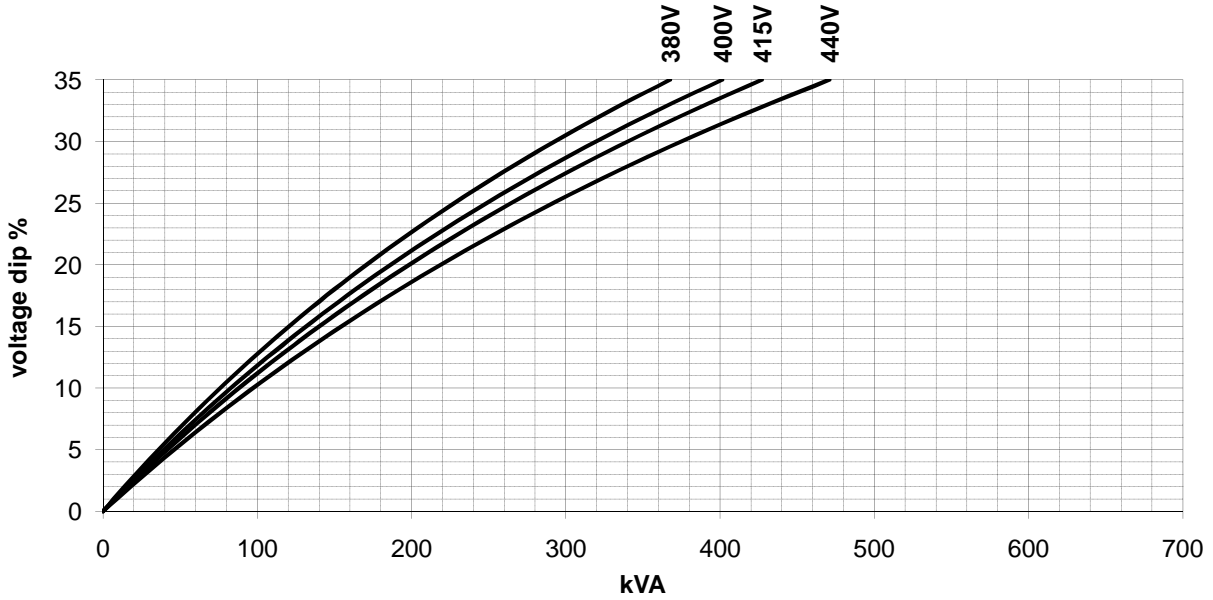

**50 Hz AREP / PMG**

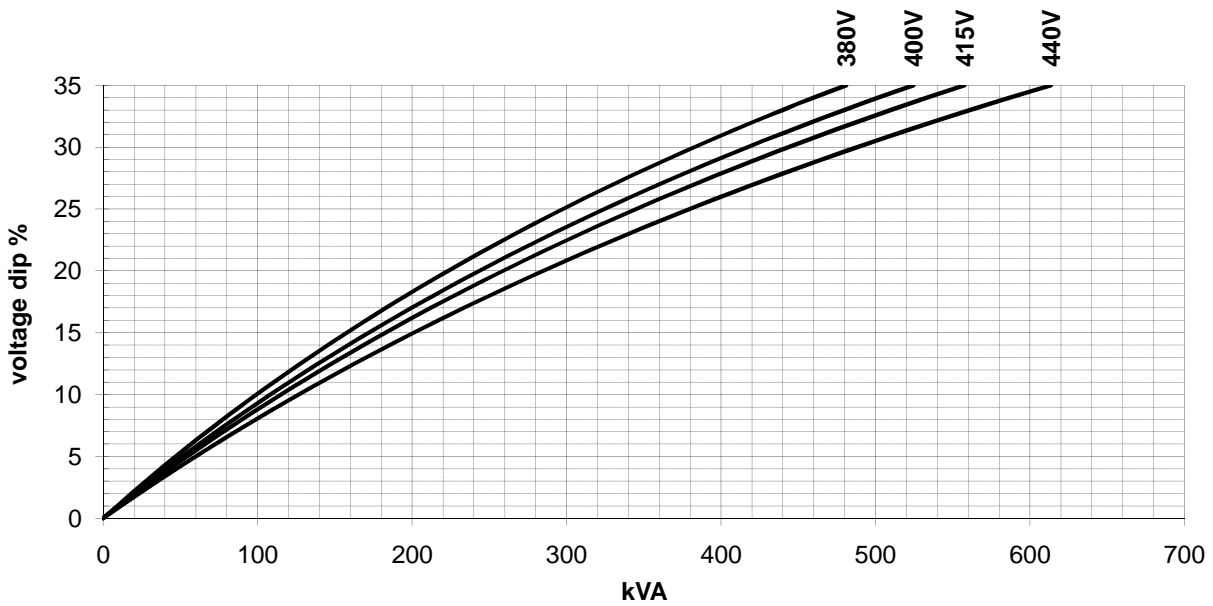

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33  
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

**FRAME 3014F / 3024F WINDING 6**




**MODELS LL3014F / LL3024F / LL3034F**


REF: F3004FW6-4 APRIL 2013

**LOCKED ROTOR MOTOR STARTING CURVES** *Power factor 0.6*

**60 Hz SHUNT**

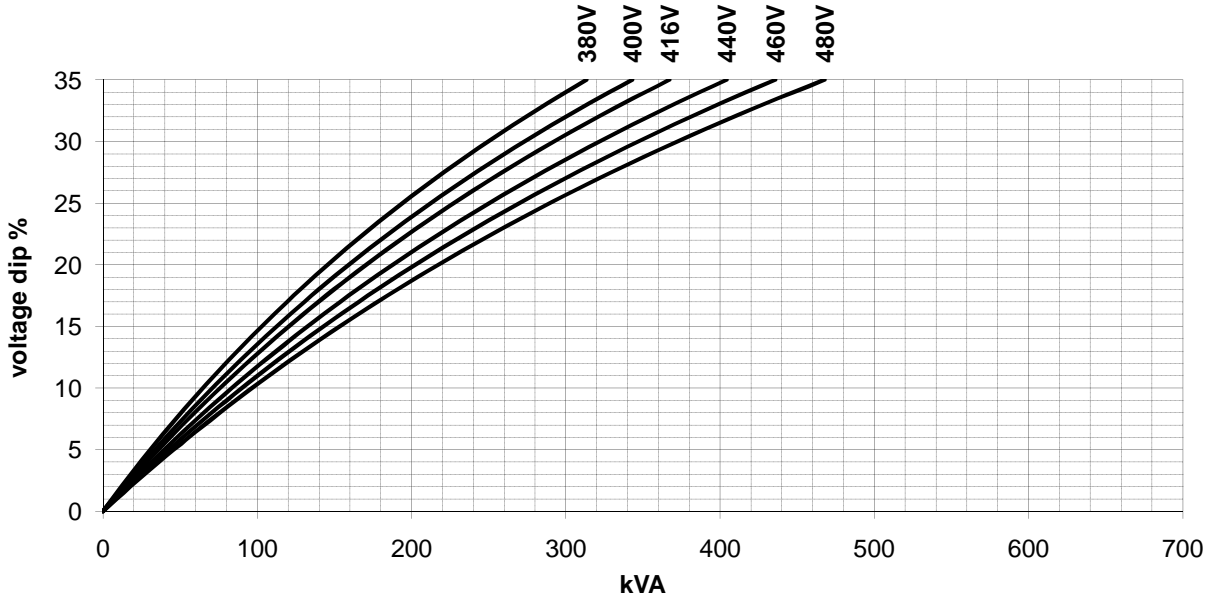

**60 Hz AREP / PMG**

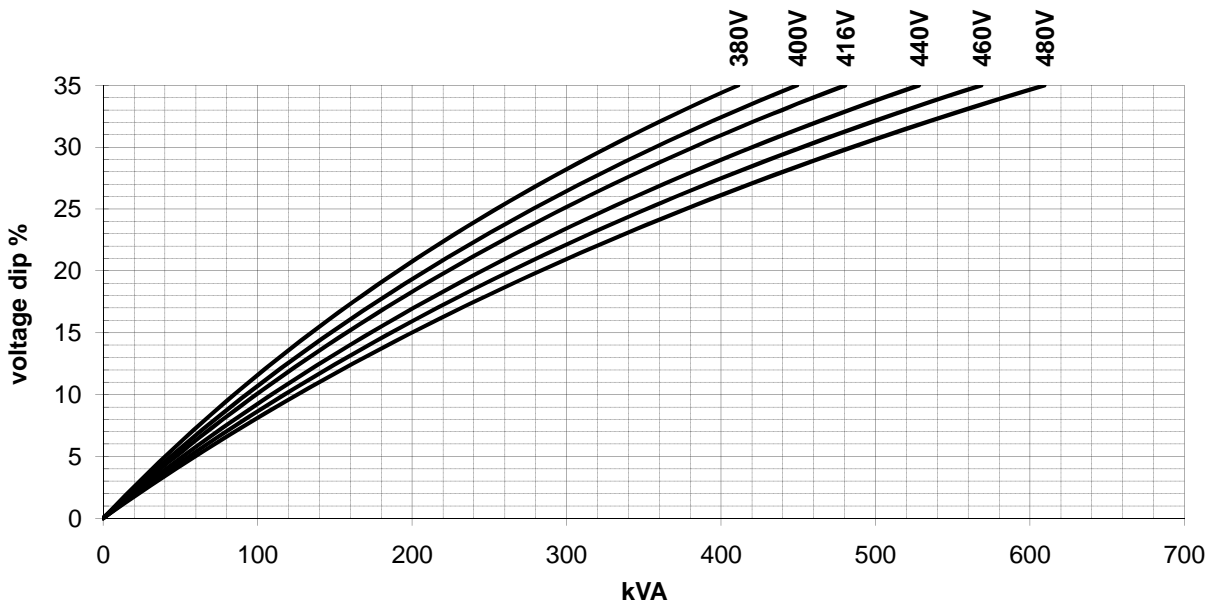

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33  
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.




**THREE-PHASE SHORT-CIRCUIT DECREMENT CURVES**

*No-load excitation at rated speed*

**400V 50Hz, 480V 60Hz**

*Series Star*

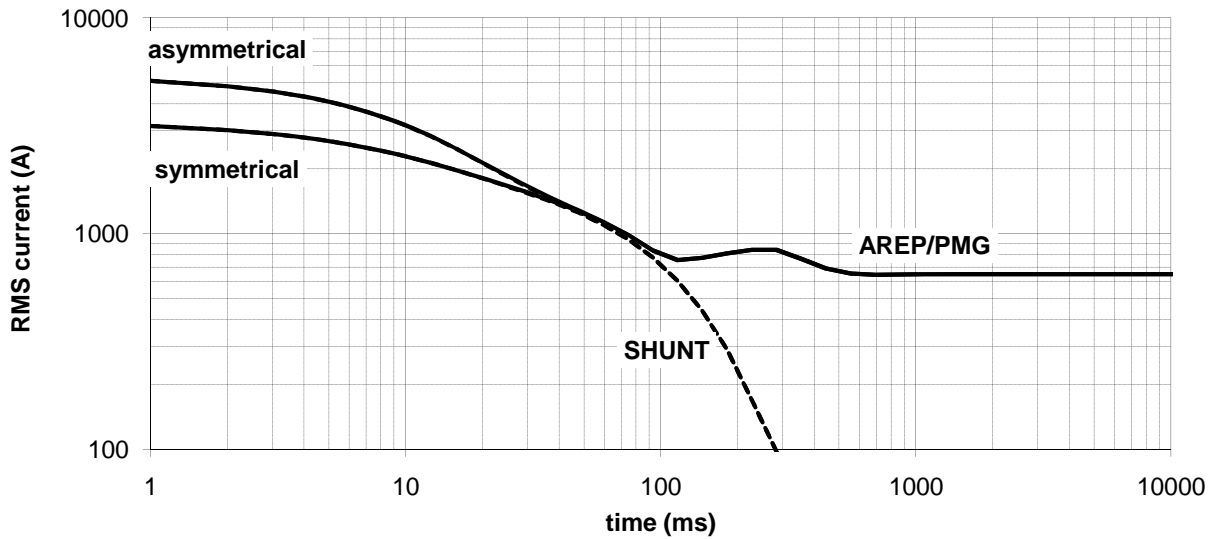

**Multiplication Factors**

<b>50Hz Voltages</b>	<b>380</b>	<b>400</b>	<b>415</b>	<b>440</b>
<b>Multiplication Factor</b>	0.95	1.00	1.04	1.10

*Apply factor up to 2xT'd, remainder of curve unchanged*

<b>60Hz Voltages</b>	<b>380</b>	<b>400</b>	<b>416</b>	<b>440</b>	<b>460</b>	<b>480</b>
<b>Multiplication Factor</b>	0.79	0.83	0.87	0.92	0.96	1.00

*Apply factor up to 2xT'd, remainder of curve unchanged*

<b>Winding Connection</b>	<b>Series Star</b>	<b>Parallel Star</b>	<b>Series Delta</b>
<b>Multiplication Factor</b>	1.00	2.00	1.73

*Apply factor to the complete curve*

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33  
 Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.